www.comsel.it

componenti elettronici • electronic components

LED E DISPLAY

SunLED

3mm

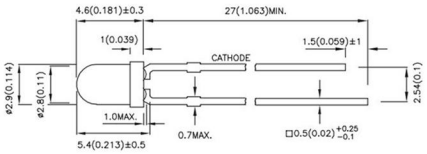

Art.	Descrizione	Intensity		Angolo di visione	Conf.
		Min.	Typ.		
0001676	LUR11D LEDS TH RED/RED ROUND 3MM	10	19	40°	1000
0001681	LUY11D LEDS TH YELLOW/YELLOW ROUND 3MM	8	14	40°	1000
0001671	LUG11D LEDS TH GREEN/GREEN ROUN 3MM	10	24	40°	1000

1.8mm



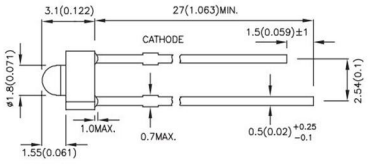

Art.	Descrizione	Intensity		Angolo di visione	Conf.
		Min.	Typ.		
0001680	LUR61D LEDS TH RED/RED ROUND 2MM	4	9	70°	1000
0001685	LUY61D LEDS TH YELLOW/YELLOW ROUND 2MM	5	7	70°	1000
0001675	LUG61D LEDS TH GREEN/GREEN ROUND 2MM	6	19	70°	1000

3mm

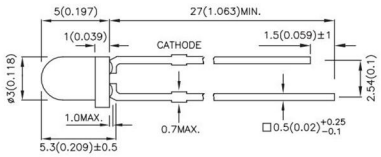

Art.	Descrizione	Intensity		Angolo di visione	Conf.
		Min.	Typ.		
0001677	LUR34D LEDS TH RED/RED ROUND 3MM	6	14	60°	1000
0001682	LUY34D LEDS TH YELLOW/YELLOW ROUND 3MM	8	14	60°	1000
0001672	LUG34D LEDS TH GREEN/GREEN ROUND 3MM	12	24	60°	1000

5mm



Art.	Descrizione	Intensity		Angolo di visione	Conf.
		Min.	Typ.		
0017390	LUR12D LEDS TH RED ROUND 5MM	25	49	30°	1000
0017391	LUY12D LEDS TH YELLOW ROUND 5MM	10	24	30°	1000
0017392	LUG12D LEDS TH GREEN ROUND 5MM	15	29	30°	1000

SunLED

3mm Round

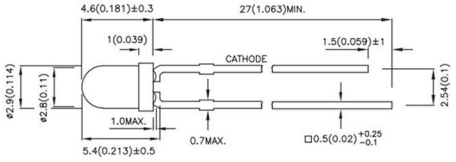

Art.	Descrizione	Intensity		Angolo di visione	Conf.
		Min.	Typ.		
0017297	LM2MR11D LED TH 3MM ULTRA BRIGHT RED/RED	200	497	40°	1000
0017393	LM2CRK11W LED TH 3MM ULTRA BRIGHT RED/CLEAR	1000	1590	34°	1000
0017394	LM2MOK11W LED TH 3MM ULTRA BRIGHT ORANGE/CLEAN	1500	2990	34°	1000
0017298	LMYK11D LED TH 3MM ULTRA BRIGHT YELLOW/YELLOW	400	795	40°	1000
0017402	LM2CYK11W LED TH 3MM ULTRA BRIGHT YELLOW/CLEAR	1600	2590	34°	1000
0017299	LDGK11W LED TH 3MM ULTRA BRIGHT GREEN/CLEAR	5000	7900	34°	1000
0017300	LCBD11D LED TH 3MM ULTRA BRIGHT BLUE/BLUE	480	995	30°	1000

5mm Round



Art.	Descrizione	Intensity		Angolo di visione	Conf.
		Min.	Typ.		
0017301	LM2MR12D LED TH 5MM ULTRA BRIGHT RED/RED	300	597	30°	1000
0017302	LM2MR12W LED TH 5MM ULTRA BRIGHT RED/CLEAR	900	1790	20°	1000
0017403	LM2MOK12W LED TH 5MM ULTRA BRIGHT ORANGE/CLEAR	4500	6990	20°	1000
0017404	LM2CYK12W LED TH 5MM ULTRA BRIGHT YELLOW/ CLEAR	4000	5990	20°	1000
0017303	LMYK12D LED TH 5MM ULTRA BRIGHT YELLOW/YELLOW	600	995	30°	1000
0017304	LMYK12W LED TH 5MM ULTRA BRIGHT YELLOW/ CLEAR	1800	2990	20°	1000
0017305	LDGK12W LED TH 5MM ULTRA BRIGHT GREEN/CLEAR	7000	11990	20°	1000
0017306	LCBD12D LED TH 5MM ULTRA BRIGHT BLUE/BLUE	600	995	20°	1000
0017307	LCBD12W LED TH 5MM ULTRA BRIGHT BLUE/CLEAR	1700	2690	16°	1000

3mm





Art.	Descrizione	Intensity		Angolo di visione	Conf.
		Min.	Typ.		
0016584	PC2LURUG11D BI-LEVEL LED INDICATOR RED/GREEN 3MM	10	19	40°	500

3.2x2.8x1.9mm
(PLCC2 Reverse Mount)









Art.	Descrizione	Intensity		Angolo di visione	Conf.
		Min.	Typ.		
0013987	ZMDK45S-9 LEDS SMD RED/CLEAR TOP LED REVERSE	55	98	120°	2000
0013988	ZMYK45S-9 LEDS SMD YELLOW/CLEAR TOP LED REVERSE	80	198	120°	2000
0013989	ZDG45S-9 LEDS SMD GREEN/CLEAR TOP LED REVERS	300	497	120°	2000

1.6x0.8x0.75mm
(0603)







Art.	Descrizione	Intensity		Angolo di visione	Conf.
		Min.	Typ.		
0001696	ZMD53W-1 LEDS SMD RED/CLEAR 0603 198mcd	70	198	120°	2000
0011980	ZMY53W-1 LEDS SMD YELLOW/CLEAR 0603 148MCD LIV.3	80	180	120°	2000
0014079	ZVG53W-1 LEDS SMD GREEN/CLEAR 0603 49mcd LIV.3	20	49	120°	2000

2.0x1.25x0.75
(0805)











Art.	Descrizione	Intensity		Angolo di visione	Conf.
		Min.	Typ.		
0001699	ZMR54WA-1 LEDS SMD RED/CLEAR 0805	40	79	120°	2000
0003103	ZMYK54W-1 LEDS SMD YELLOW/CLEAR 0805	80	148	120°	2000
0003106	ZVG54W-1 LEDS SMD GREEN/CLEAR 0805	20	49	120°	2000
0014126	ZCBD54W-1 LEDS SMD BLUE/ CLEAR	40	98	120°	2000

SunLED

1.6x1.25x0.65mm
(0605 Bi-Color)

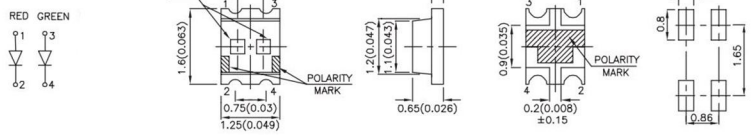

Art.	Descrizione	Intensity		Angolo di visione	Conf.
		Min.	Typ.		
0017411	ZURMG62W-1 LEDS SMD RED/GREEN CLEAR	3	6	120°	2000
		5	11	120°	2000
0017412	ZMDKVG62W-1 LEDS SMD RED/GREEN CLEAR	40	79	120°	2000
		20	39	120°	2000

5.6x3.0x0.77mm

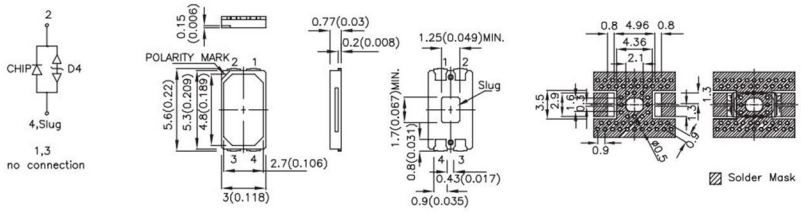

Art.	Descrizione	Intensity		Angolo di visione	Conf.
		Min.	Typ.		
0017416	ZMOLA143S LEDS SMD RED	12	13.7	120°	1000
0017414	ZMYLA143S LEDS SMD YELLOW	12	14.7	120°	1000
0017415	ZDG25X143S LEDS SMD GREEN	20	26.7	120°	1000

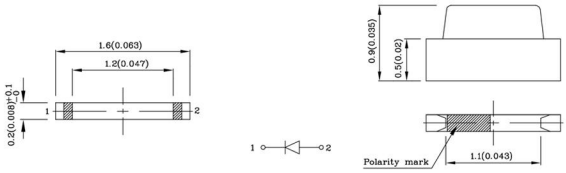

Art.	Descrizione	Intensity		Angolo di visione	Conf.
		Min.	Typ.		
0017416	ZMEF151W RED CLEAR	80	198	150°	1000
0017417	ZMDF151W RED CLEAR	80	208	150°	1000
0017418	ZMOF151W ORANGE CLEAR	40	118	150°	1000
0017419	ZMYF151W YELLOW CLEAR	40	74	150°	1000
0017420	ZVGF151W GREEN CLEAR	12	29	150°	1000
0017421	ZCBDF151W BLUE CLEAR	8	19	150°	1000

SunLED

3.2x1.6x0.75
(1206)



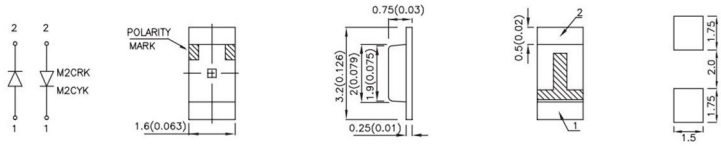

Art.	Descrizione	Intensity		Angolo di visione	Conf.
		Min.	Typ.		
0017422	ZMDK55W-1 LEDS SMD RED	40	79	120°	2000
0017423	ZMOK55W-1 LEDS SMD ORANGE	80	178	120°	2000
0017424	ZMYK55W-1 LEDS SMD YELLOW	80	148	120°	2000
0017425	ZVG55W-1 LEDS SMD GREEN	20	49	120°	2000
0017426	ZDG55W-1 LEDS SMD GREEN	200	347	120°	2000
0010040	ZCBD55W-1 LEDS SMD BLUE	40	98	120°	2000

3.2x1.6x1.05
(1206 Reverse Mount)

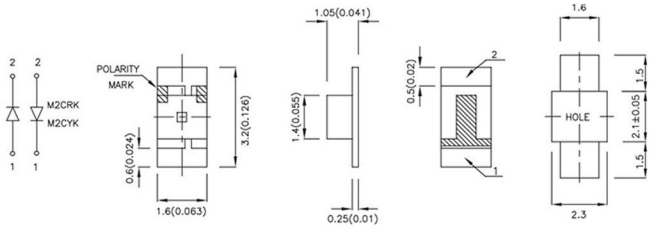

Art.	Descrizione	Intensity		Angolo di visione	Conf.
		Min.	Typ.		
0001693	ZBBA55W-2 LEDS SMD BLUE/CLEAR 1206INVERTED LEV.3	40	98	120°	2000

3.2x1.6x1.8mm
(1206 Dome Lens Bi-Color)

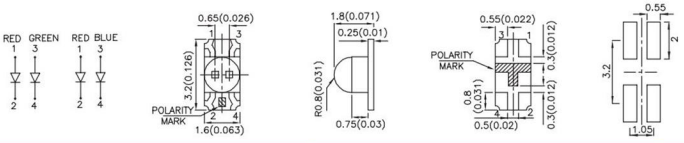

Art.	Descrizione	Intensity		Angolo di visione	Conf.
		Min.	Typ.		
0017366	ZMDKCBD55W-8 LEDS SMD RED/BLUE CLEAR	200	397	30°	2000
		120	248	30°	2000
0016380	ZMDKVG55W-8 LEDS SMD RED/GREEN CLEAR	200	397	30°	2000
		120	248	30°	2000

3.2x1.6x1.8mm
(1206 Dome Lens)



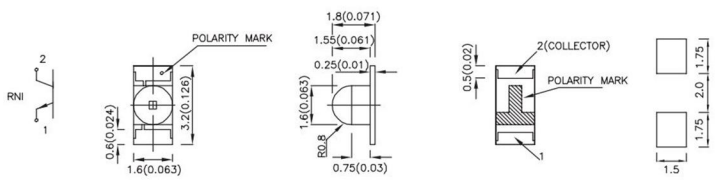

Art.	Descrizione	Conf.
0016277	ZRNI55W-3 LEDS SMD WHITE 1206	2000

SunLED

3.2x1.6x1.8mm
(1206 Dome Lens)

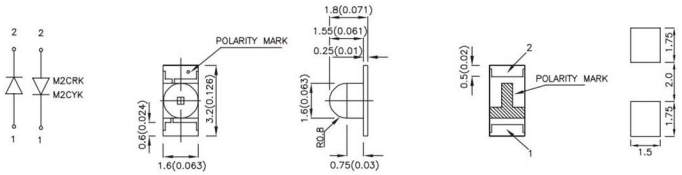

Art.	Descrizione	Intensity		Angolo di visione	Conf.
		Min.	Typ.		
0005179	ZTNI55W-3 PHOTO DIODE SMD INFRARED1206 DOME	2	4.8	35°	2000

3.0x1.0x2.5mm
(1104 Right Angle)

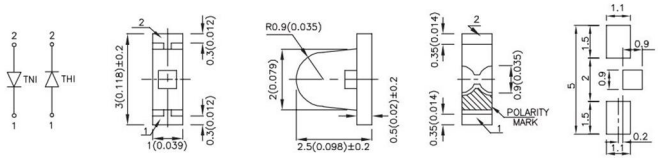

Art.	Descrizione	Intensity		Angolo di visione	Conf.
		Min.	Typ.		
0005173	ZTNI56W- SELECTION B- LEDS SMD INFRARED R.A	1.2	2.3	30°	2000

3.0x1.0x2.5mm
(1104 Right Angle)

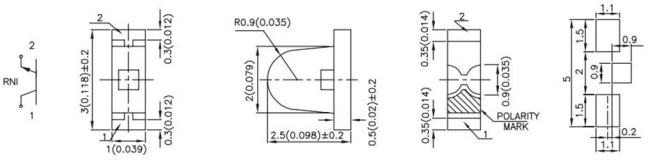

Art.	Descrizione	Conf.
0005177	ZRNI56W -SELECTION I - PHOTOTRANSISTOR SMD INFRARED	2000

2.1x0.6x1.0mm
(0802 Right Angle)

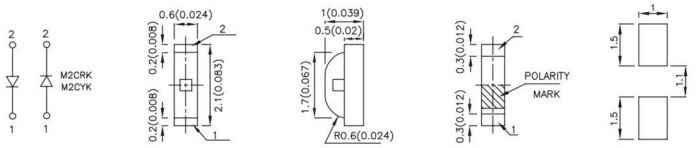

Art.	Descrizione	Intensity		Angolo di visione	Conf.
		Min.	Typ.		
0009172	ZMDK74W LEDS SMD RED/CLEAR RIGHT ANGLE	110	218	120°	2000
0009602	ZMO74W LEDS SMD ORANGE/CLEAR RIGHT ANGLE	80	178	120°	2000
0009601	ZMY74W LEDS SMD YELLOW/CLEAR RIGHT ANGLE	120	198	120°	2000
0009851	ZSGK74W LEDS SMD GREEN/CLEAR RIGHT ANGLE LIV.3	36	69	120°	2000

8.89x19.05mm



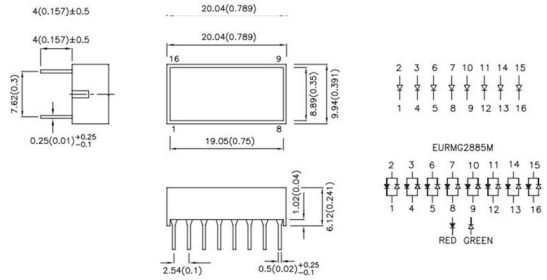

Art.	Descrizione	Intensity		Conf.
		Min.	Typ.	
0005193	EMRH100M LEDS TH RED BAR LED 16 LED 9x19MM	55	108	25

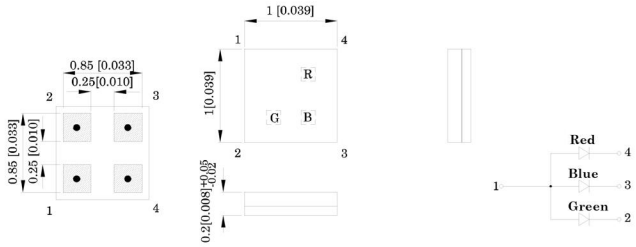

Art.	Descrizione		Intensity		Angolo di visione	Conf.
			Min.	Typ.		
0017401	ZBGRBBRMER150W CLEAR	GREEN	50	79	150°	1000
		BLUE	10	22	150°	1000
		RED	15	29	150°	1000

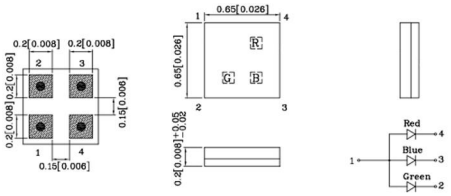

Art.	Descrizione		Intensity Min.	Intensity Typ.	Angolo di visione	Conf.
0017405	ZBGRBBRMER158W CLEAR	GREEN	30	89	140°	
		BLUE	5	19	140°	
		RED	10	29	140°	



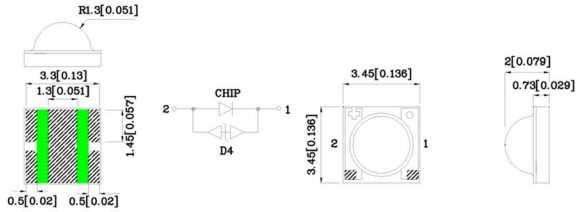

Art.	Descrizione		Intensity Min.	Intensity Typ.	Angolo di visione	Conf.
0017406	ZMDH160S CLEAR	RED B8	35	42	120°	1000
0017407	ZMYH160S CLEAR	YELLOW B8	35	42	120°	1000
0017408	ZDG10X160S CLEAR	GREEN B13	80	90	120°	1000
0017409	ZCB14X160S CLEAR	BLUE B4	17	20	120°	1000

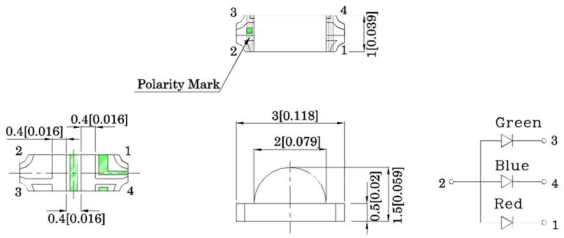

Art.	Descrizione		Intensity Min.	Intensity Typ.	Angolo di visione	Conf.
0017410	ZMEDGCBD56W	GREEN	80	138	140°	1000
		BLUE	300	497	140°	1000
		RED	40	69	140°	1000

0.32"(8mm)

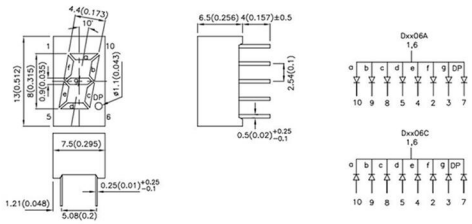

Art.	Descrizione	Intensity		Conf.
		Min.	Typ.	
0003113	DMR06A DISPLAYS TH RED 0,32 AC	14000	30990	39

0.39"(9.9mm)

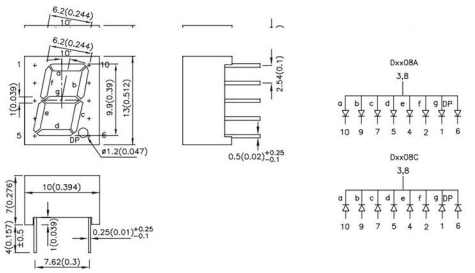

Art.	Descrizione	Intensity		Conf.
		Min.	Typ.	
0003125	DUR08A DISPLAYS TH RED 0,39 AC	1400	4090	39
0003115	DMR08A DISPLAYS TH RED 0,39 AC	9000	16990	39

0.8"(20.32mm)

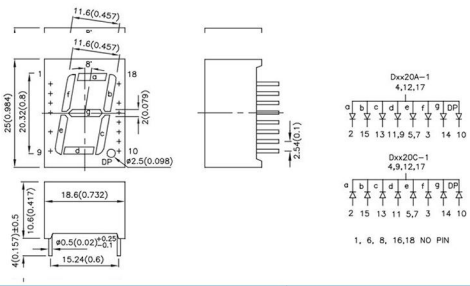

Art.	Descrizione	Intensity		Conf.
		Min.	Typ.	
0003122	DMR20A-A DISPLAY TH RED 0,8 AC	31000	60990	18
0013836	DMYK20C DISPLAY TH YELLOW	52000	139990	18

0.4"(10.16mm)



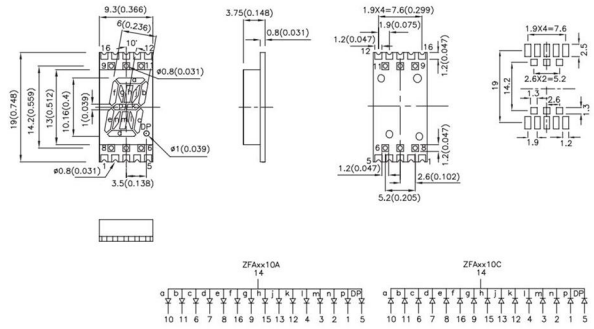

Art.	Descrizione	Intensity		Conf.
		Min.	Typ.	
0013428	ZFMDK10A DISPLAY SMD RED 0,4 AC HIPER 27mcd	14000	35990	400

0.4"(10.16mm)



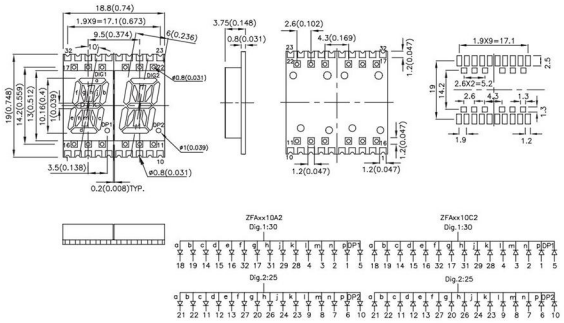

Art.	Descrizione	Intensity		Conf.
		Min.	Typ.	
0015832	ZFAMDK10A2 DISPLAY SMD RED	14000	35990	250

rev. 00

SP Busto Cassano, 2
21054 Fagnano Olona (VA) - ITALY
Tel. +39 0331 202255 - Fax +39 0331 202338
info@comsel.it

www.comsel.it